

QUICK GUIDE


PAL to NTSC



All in One Series

By default, the devices come in a PAL signal. You need to change it to the NTSC signal. We'll explain you how to do it here:


1. Press the right click and go to the Main Menu

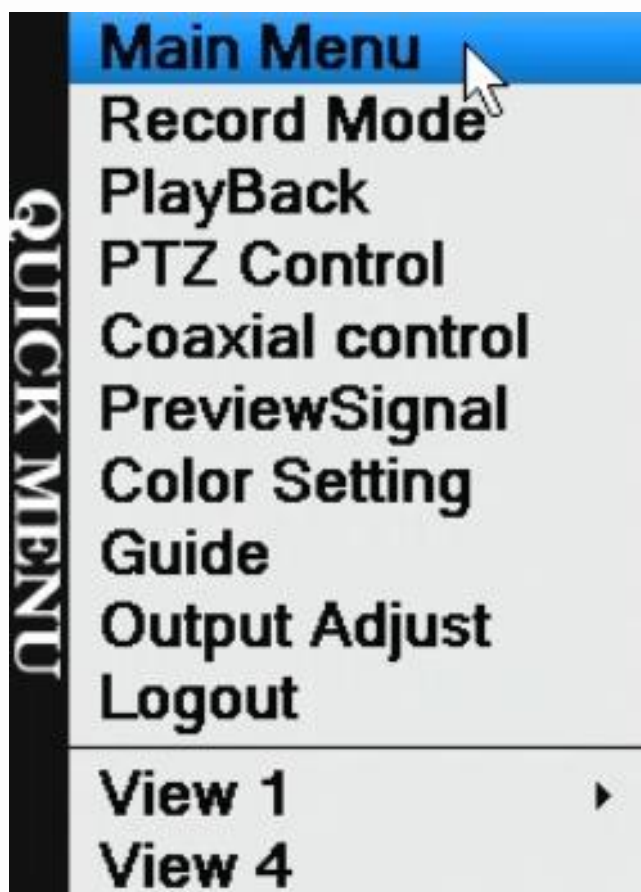

2. Select the System button. Now select the General button



3. Here you will find the Video Standard Option. Please change the option from PAL to NTSC.

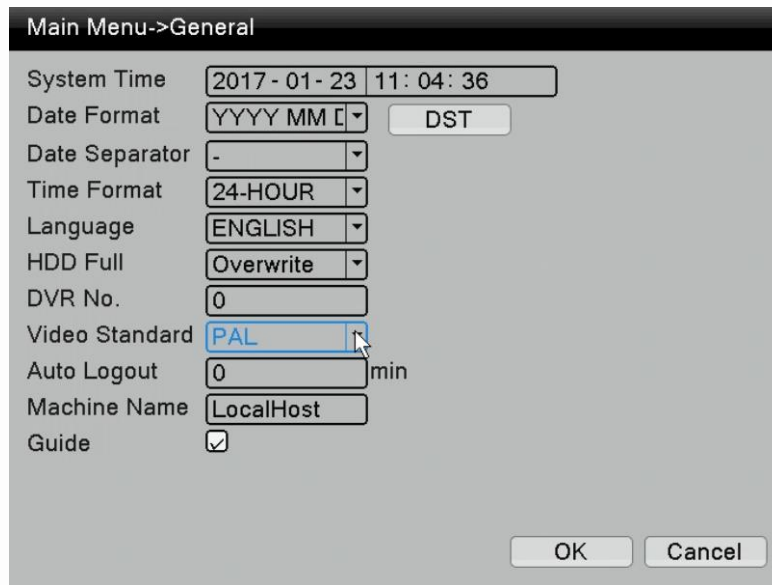

Main Menu->General

System Time 2017 - 01 - 23 11: 04: 36

Date Format YYYY MM [] DST

Date Separator - []

Time Format 24-HOUR []

Language ENGLISH []

HDD Full Overwrite []

DVR No. 0


Video Standard PAL []

Auto Logout 0 min

Machine Name LocalHost

Guide

OK Cancel

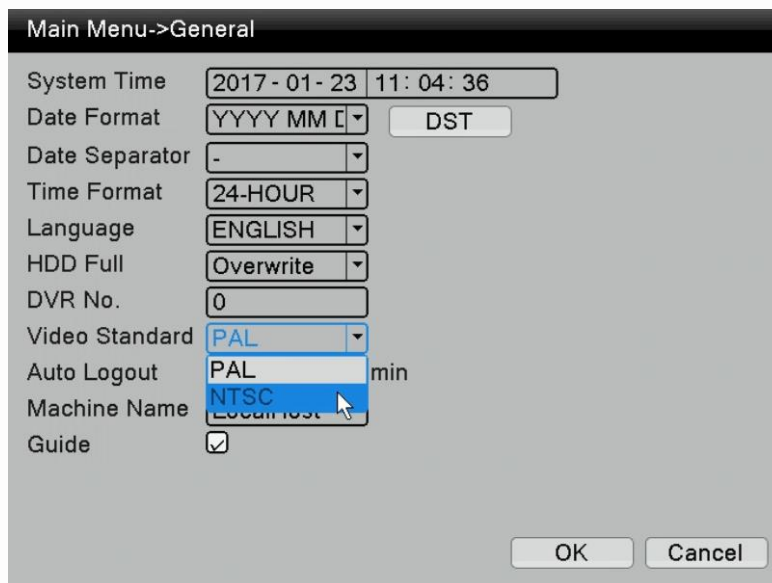

Main Menu->General

System Time 2017 - 01 - 23 11: 04: 36

Date Format YYYY MM [] DST

Date Separator - []

Time Format 24-HOUR []

Language ENGLISH []

HDD Full Overwrite []

DVR No. 0

Video Standard PAL []


Auto Logout PAL min

Machine Name LocalHost

Guide

OK Cancel

4. Press OK to save the change and reboot the DVR.

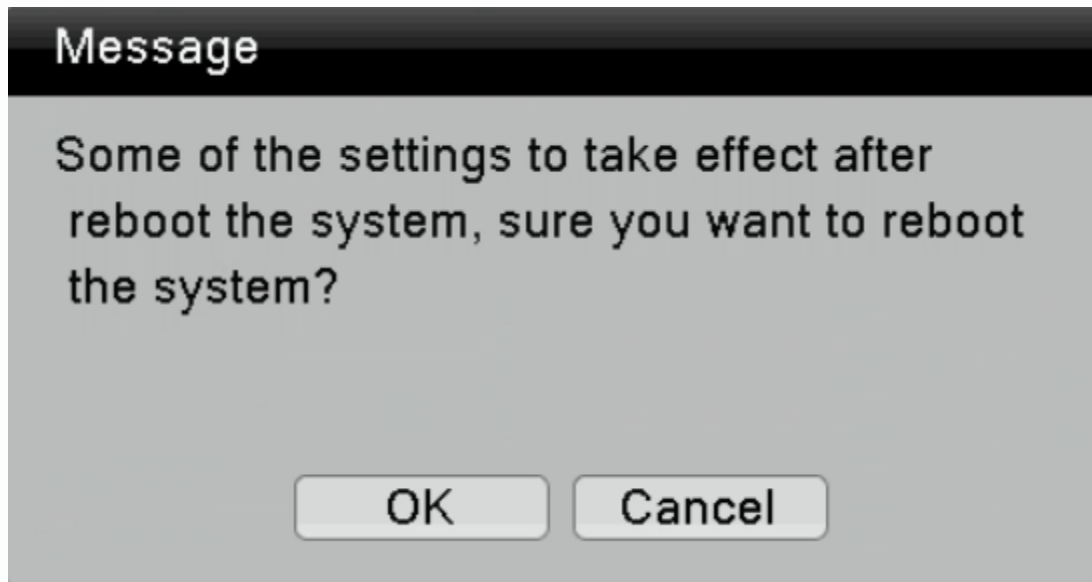

And now you'll be able to see your cameras.

Any other questions you can contact our
Technical Support Department at support@logan-cam.com



<http://www.logan-cam.com/>