

SECURITY KIT


5MPX All in One Hybrid 16CH DVR 8 Bullet 5MPX TVI Cameras

TECHNICAL SPECIFICATIONS FOR DVR

VIDEO	
Video Input	DVR: 16CH BNC 5MPX Hybrid: 8CH BNC 5MPX + 8CH IP 2MPX
	NVR: 16CH IP 5MPX
Video Output	VGA, HDMI, BNC
Display Resolution	Up to 4K monitor
Display Split	DVR: 1/4/8/9/16 Screen Hybrid: 1/4/8/9/16 Screen NVR: 1/4/8/9/16 Screen
AUDIO	
Audio Input	16 Channel RCA
Audio Output	1 Channel RCA
RECORDING	
Record Quality	Up to 5MPX (2560 x 1920)
Video Compression	H.264 (High Profile)
Record Mode	Manual / Schedule / Motion / Alarms
PLAYBACK	
Simultaneously Playback	1/2/4/8/16 Channels
Backup Mode	USB Device, Web Browser, Mobile App
Playback Quality	Up to 5MPX (2560 x 1920)
EXTERNAL PORTS	
USB Port	3 Ports, USB 2.0
RS485	1 Port for PTZ Control
Ethernet	1 RJ-45 Port (10/100Mbps)
STORAGE	
HDD Port	4 SATA Port
HDD Capacity	Up to 4TB each HDD
GENERAL	
Power Supply	DC 12V/6A
Video System	NTSC/PAL Switch Selectable
Remote Access	Cloud System For Remote Access, NO Port Mapping
Compatibility For	iOS, Android, Windows and MAC
Compatible Video Format	AHD / TVI / CVI / CBVS / IP Cameras



MODEL: LX6FNR-8T5BBCR

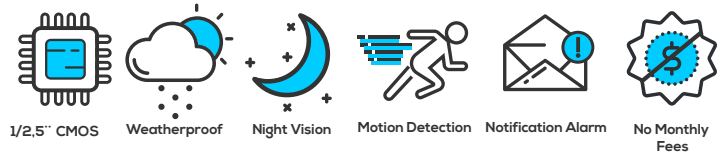

TECHNICAL SPECIFICATIONS FOR THE CAMERA

Image Sensor	1/2,5" Progressive Scan CMOS APTINA
Camera Resolution	5 Megapixel
Effective Pixels	2560(H) x 1920(V)
Infrared LED	18pcs SMD
Lens	3,6mm Lens
Video Output	1CH BNC-TV1
Field of View	85° Degrees
IR Cut Filter	Yes
Minimum Illumination	1lux (IR LED ON), 3lux (IR LED OFF)
IR Distance	82~98ft / 25~30m
Shutter Speed	1/25s [1/10000s (20fps)]
Operative Temperature	-4°F~131°F / -22°C~55°C
Ingress Protection	IP66
Signal System	PAL/NTSC
Power Supply	DC12V / 320mA



LOGAN LIVE
FREE APP
Remote View

