

# USER MANUAL

## LOGAN CAM VIEW FOR PC

## LOGAN CAM VIEW PARA PC

English / Español




# ENGLISH SECTION


# PC Installation

1. Download the application Logan Cam View for PC through the following link:


<https://support.logan-cam.com/hc/en-us/articles/115000940287-Logan-Cam-View>

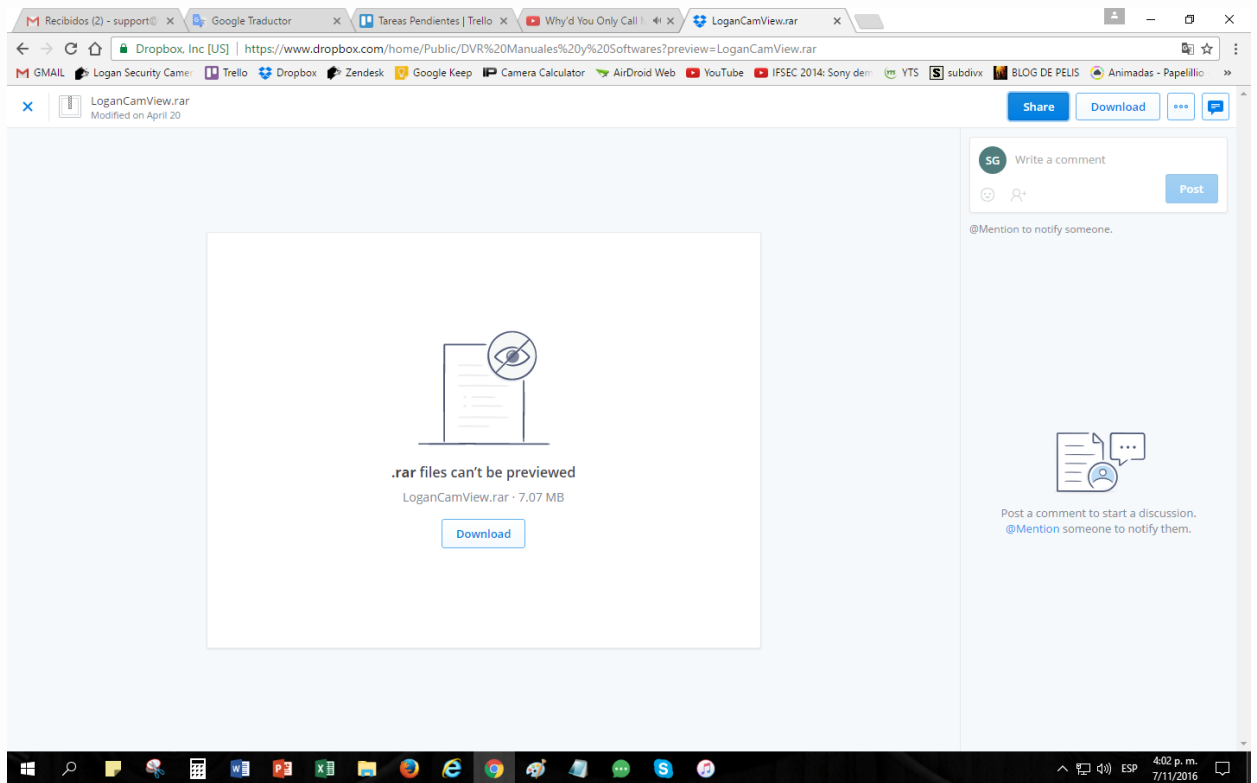


2. Press right button on the downloaded file and extract the documents in the location that you prefer or in the current location by selecting Extract Here.

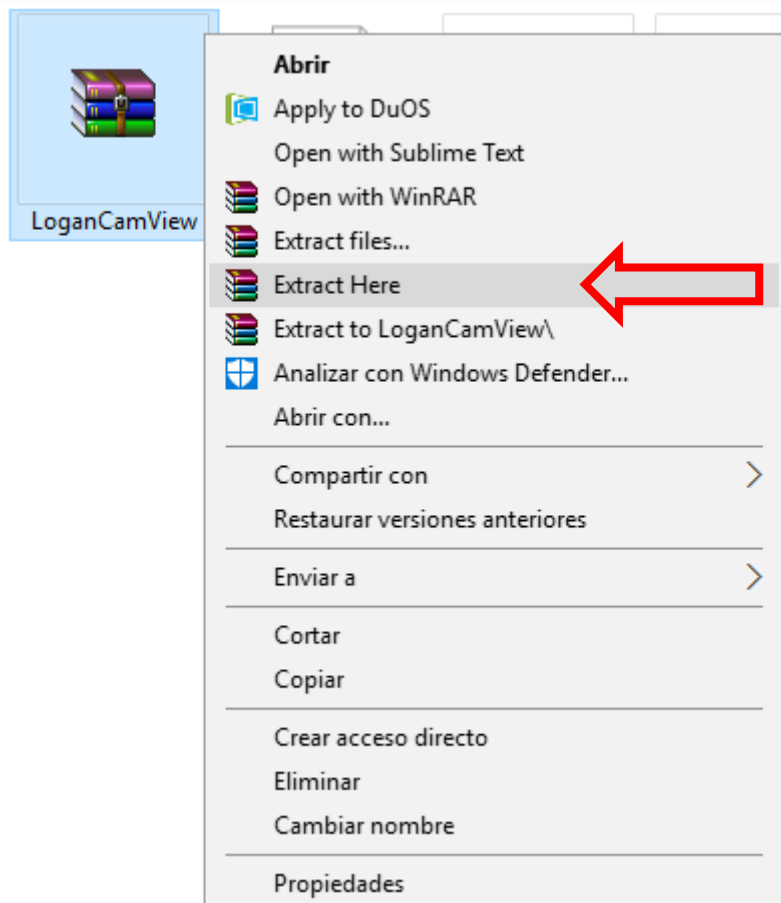

3. Once you extract the compressed file, install the application pressing right button and selecting Run as Administrator.

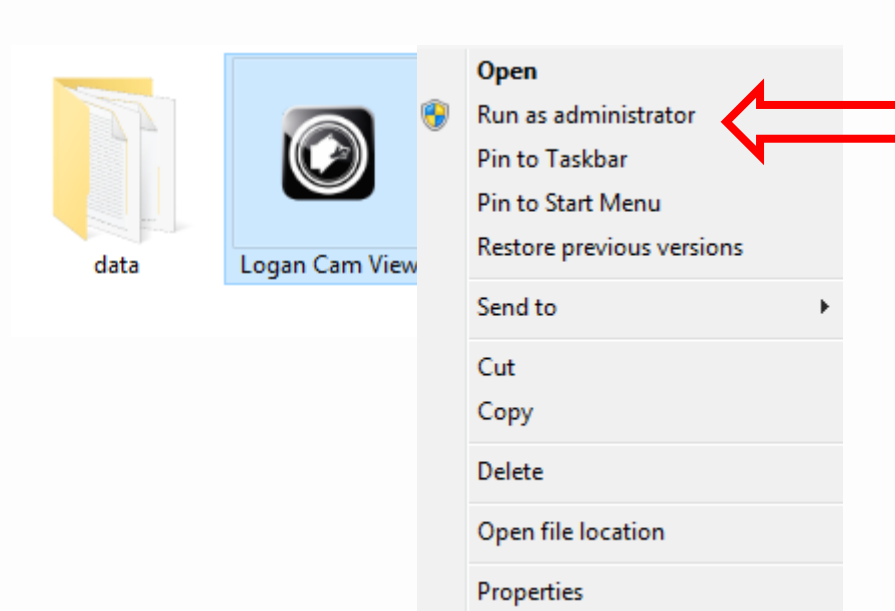

After the installation, if you want to start the application on your computer you must press right click on the Logan Cam View Icon at your desktop and select Run as Administrator.

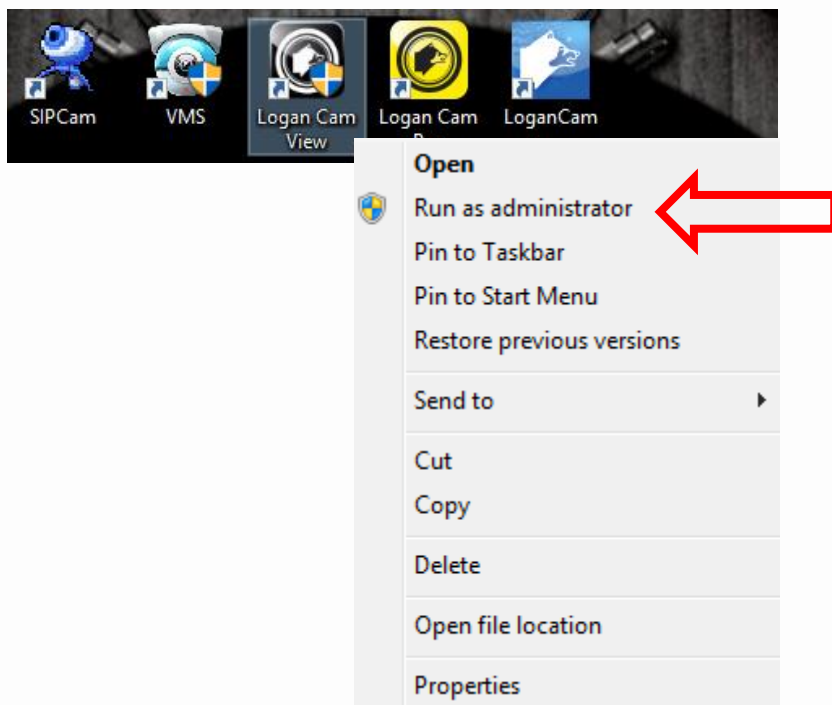


You must Login into the application with the default access:

User Name: admin

Password: blank

If you want your computer to remember the access the next time, activate Remember Password check box.

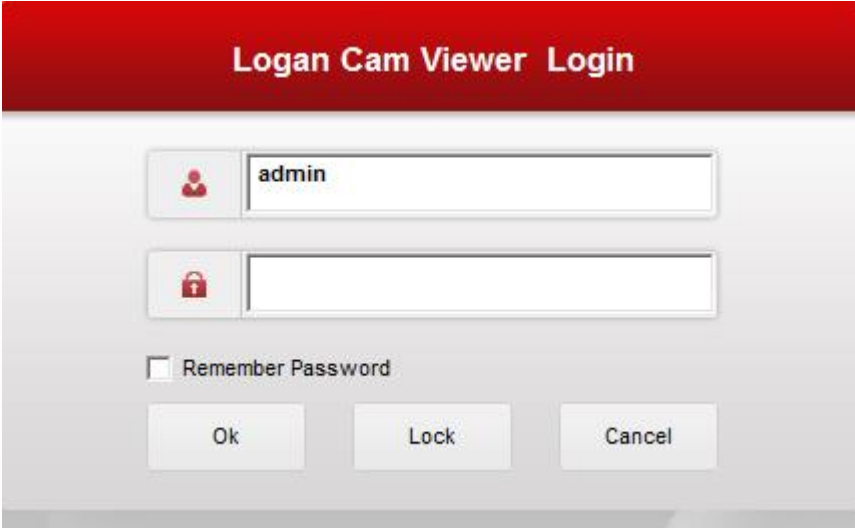


The image shows a login dialog box titled "Logan Cam Viewer Login". It features a red header bar with the title in white text. Below the header, there are two input fields: the first is for the username, containing the text "admin", and the second is for the password, which is currently blank. To the left of each input field is a small red icon: a person icon for the username field and a padlock icon for the password field. Below the password field is a checkbox labeled "Remember Password", which is currently unchecked. At the bottom of the dialog, there are three buttons: "Ok", "Lock", and "Cancel".

Then Press OK.


On the Main Screen of the app, you can see different options of settings and visualization.

To add a new device, press the Devices Icon.

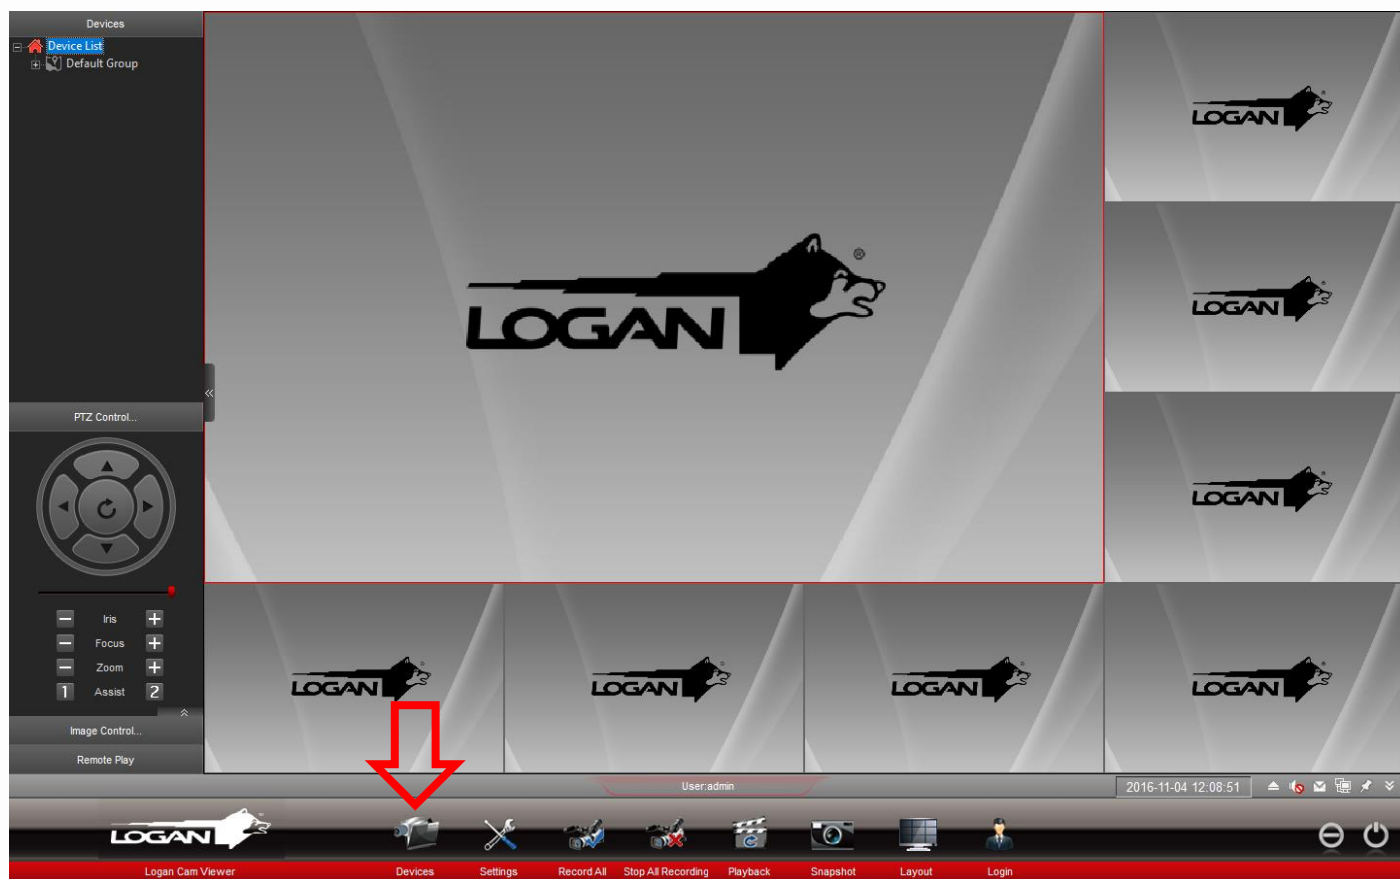



Press the Manually.. button and enter the data for your device.

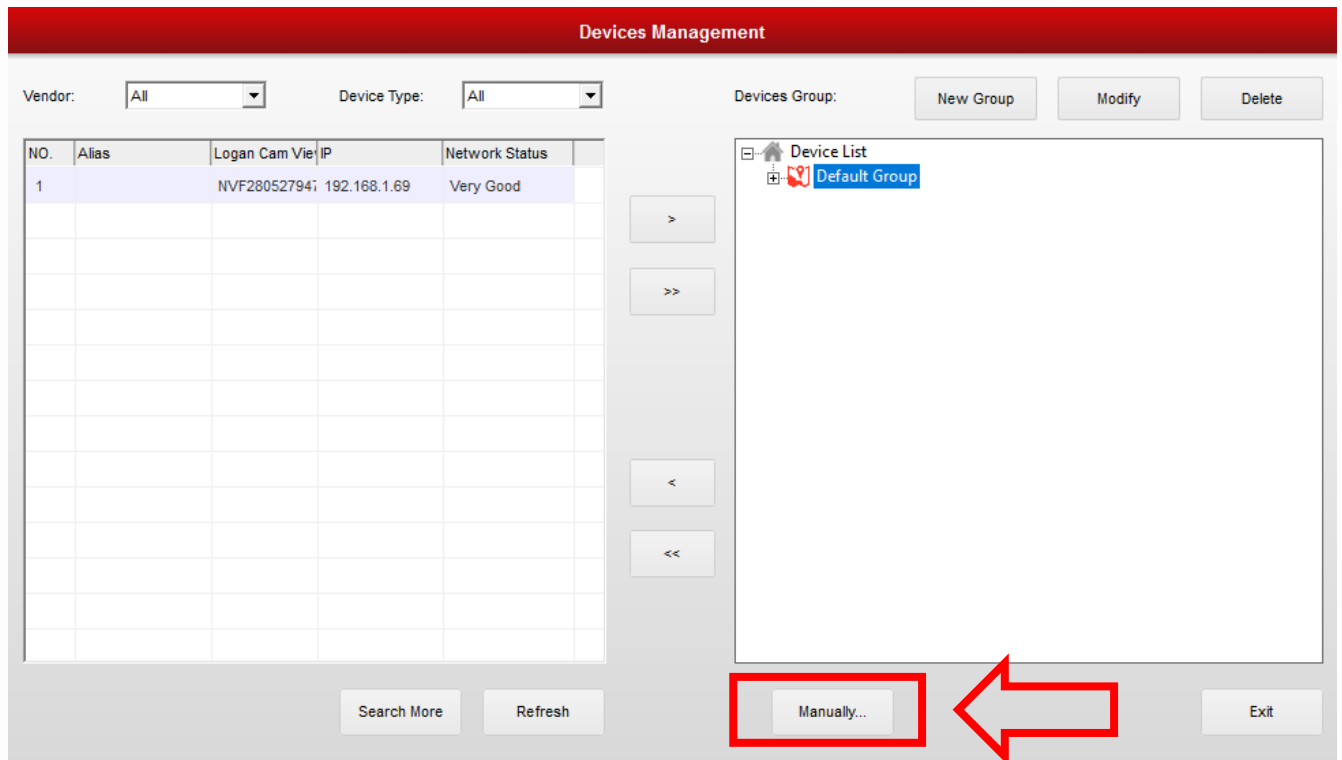

The screenshot displays the 'Devices Management' interface. At the top, there are dropdown menus for 'Vendor:' (set to 'All') and 'Device Type:' (set to 'All'). To the right, there are buttons for 'New Group', 'Modify', and 'Delete'. Below these are two main panels: a table on the left and a 'Device List' on the right. The table has columns for 'NO.', 'Alias', 'Logan Cam Vie|IP', and 'Network Status'. The first row contains the values '1', 'NVF28052794', '192.168.1.69', and 'Very Good'. Between the panels are navigation buttons: '>', '>>', '<', and '<<'. At the bottom, there are buttons for 'Search More', 'Refresh', 'Manually...', and 'Exit'. The 'Manually...' button is highlighted with a red rectangular box, and a red arrow points to it from the right.

NO.	Alias	Logan Cam Vie IP	Network Status
1	NVF28052794	192.168.1.69	Very Good

Nota: Before entering the data of your device, you must take note of the ID of your DVR, located at the top right of the main screen.

The data input are:

Device: a referential name, for example: home, office, etc.

Vendor: by default, is Logan Cam Viewer


Connect Type: by default, is Logan Cam Viewer

Logan Cam: Enter the ID of your DVR equipment

UserName: By default, admin

Password: By default, blank

Press OK.



Device Config

Device: New Device

Vendor: Logan Cam Viewer

Connect Type: Logan Cam Viewer

Logan Cam: 0

Port: 9101

User name: admin

Password: \*\*\*\*\*

Ok Network... Exit

Note: If the access of your DVR was set up with a different password, include it in the Password field

Your device must be displayed on the left side of the screen, which must deploy and activate the cameras to monitor all individually or by selecting Connect (Main Stream) or Connect (Minor Stream).



You have completed the configuration of your DVR through the VMS application from your computer.




# SECCIÓN ESPAÑOL


# Instalación en PC

1. Descargue la aplicación Logan Cam View para PC en el enlace a continuación:


<https://support.logan-cam.com/hc/es/articles/115000940287-Logan-Cam-View>

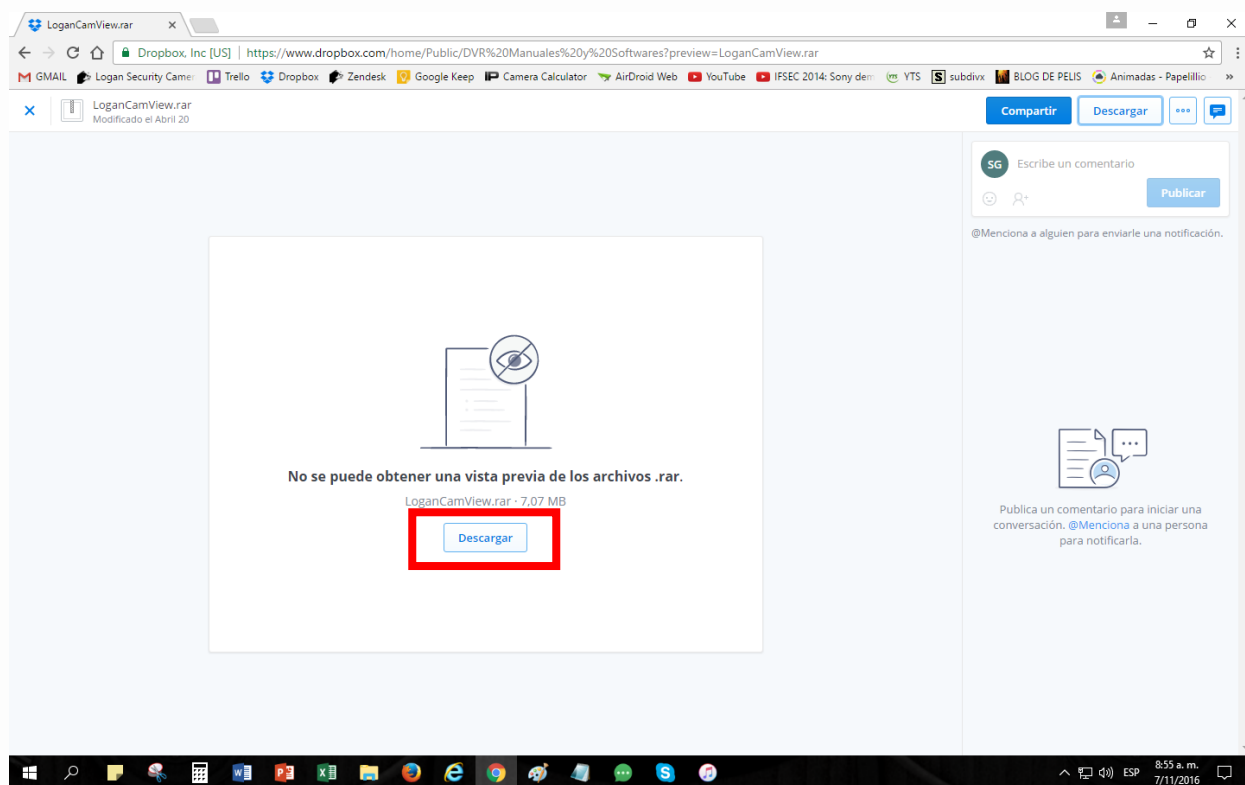


2. Presione botón derecho sobre el archivo descargado y extraiga los documentos en la ubicación de su preferencia o en la actual seleccionando Extract Here (Extraer Aquí)

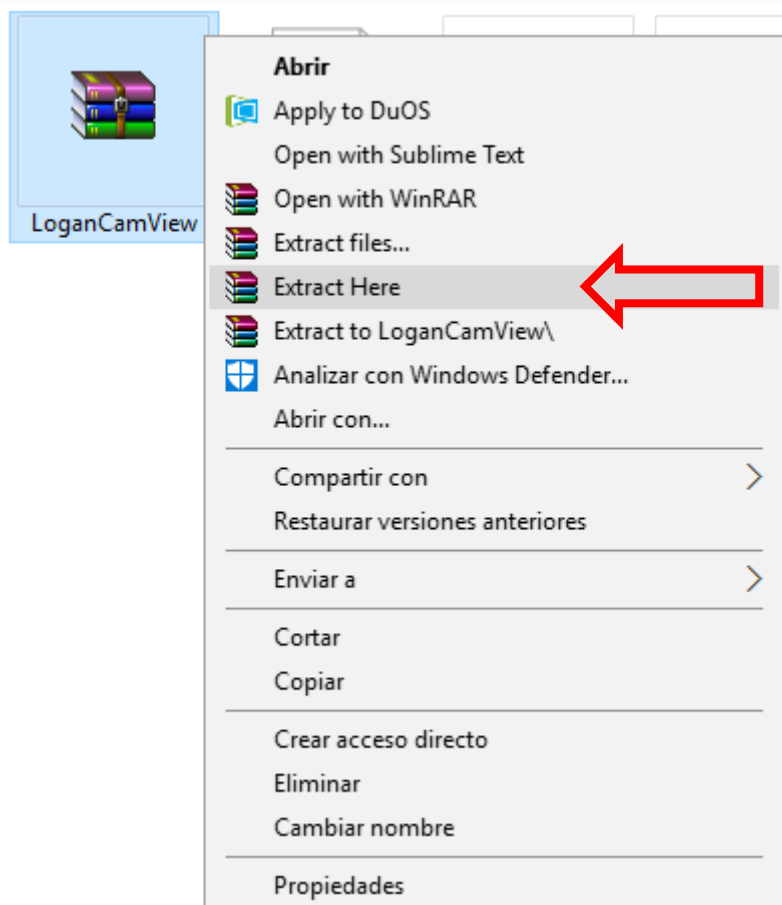

3. Una vez extraído el contenido del archivo comprimido, instale la aplicación presionando botón derecho y seleccionando la opción de Ejecutar como Administrador.

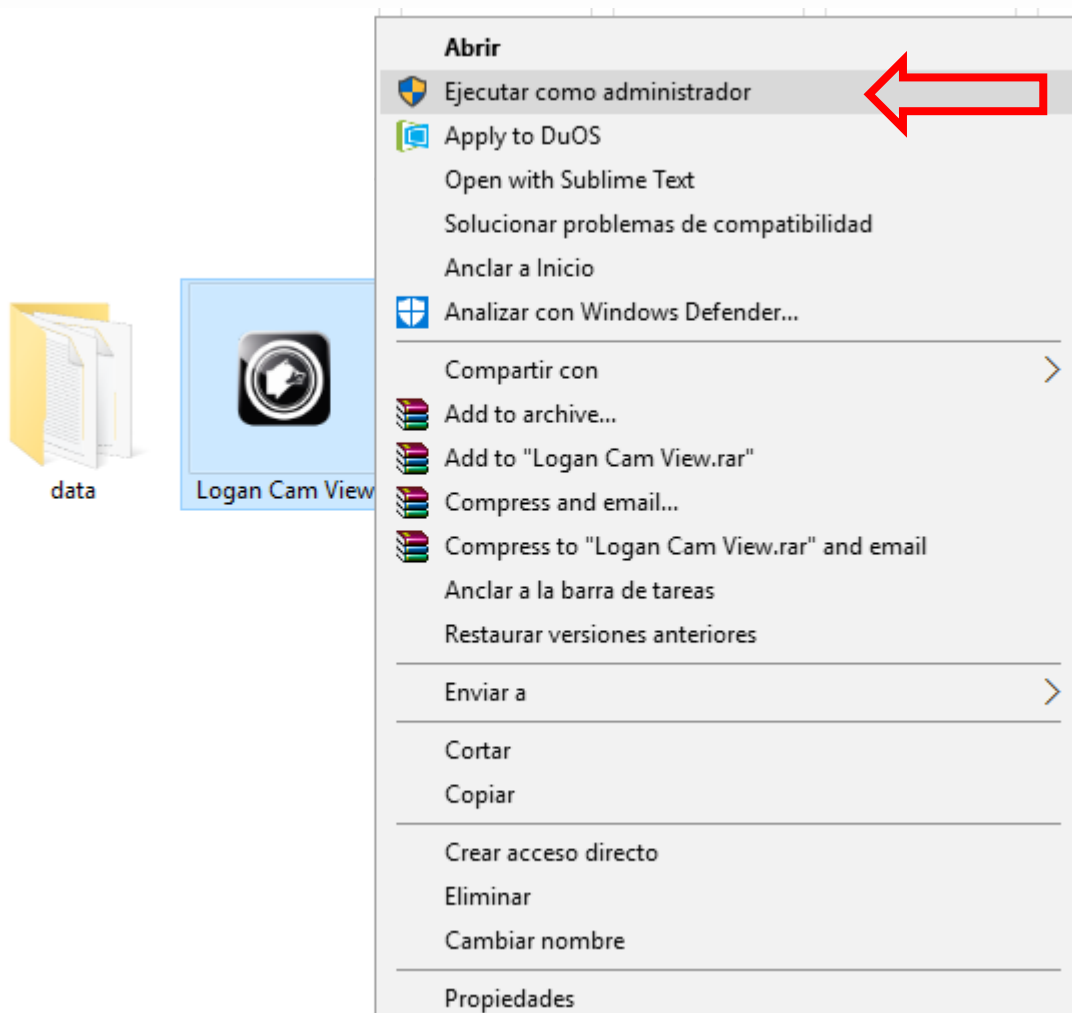

Finalizada la instalación, si desea iniciar la aplicación en su computador debe presionar botón derecho en el ícono correspondiente al programa y seleccionar la opción de Ejecutar como Administrador.

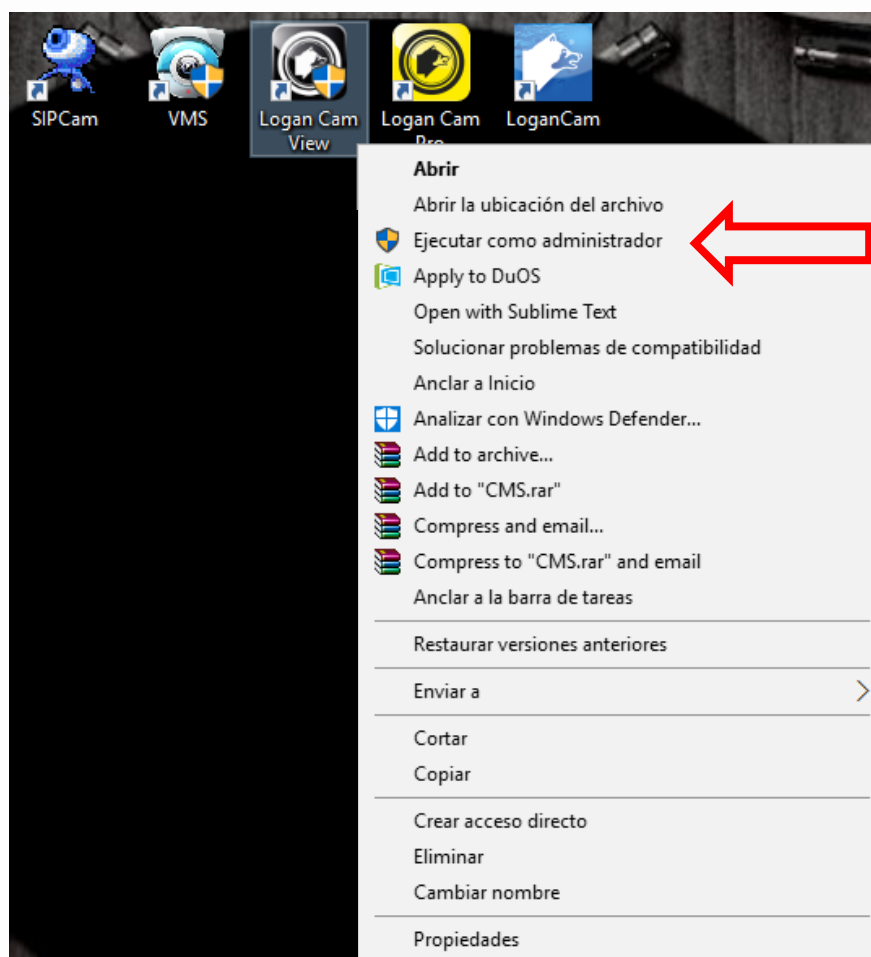




Debe ingresar en la aplicación con los datos por defecto:

User Name (Usuario): admin

Password (Contraseña): en blanco

Si desea que su equipo recuerde los datos de acceso en posteriores ocasiones, active la opción Remember Password (Recordar Contraseña).

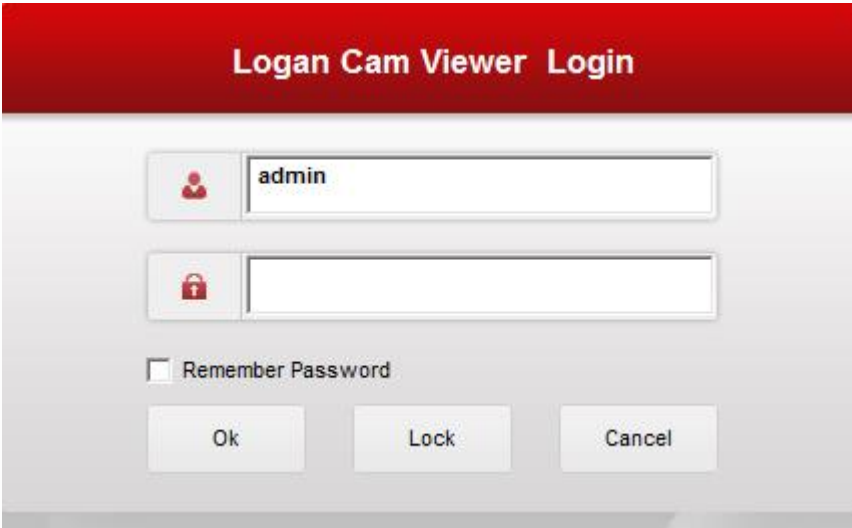


The image shows a login dialog box titled "Logan Cam Viewer Login". It features a red header bar with the title in white text. Below the header, there are two input fields: the first is for the username, containing the text "admin", and the second is for the password, which is currently empty. To the left of the password field is a red padlock icon. Below the input fields is a checkbox labeled "Remember Password", which is currently unchecked. At the bottom of the dialog, there are three buttons: "Ok", "Lock", and "Cancel".

Presione OK.

En la pantalla principal de la aplicación, se visualizan las diferentes opciones de configuración y visualización.

Para agregar un nuevo equipo, presione la opción Devices (Dispositivos).

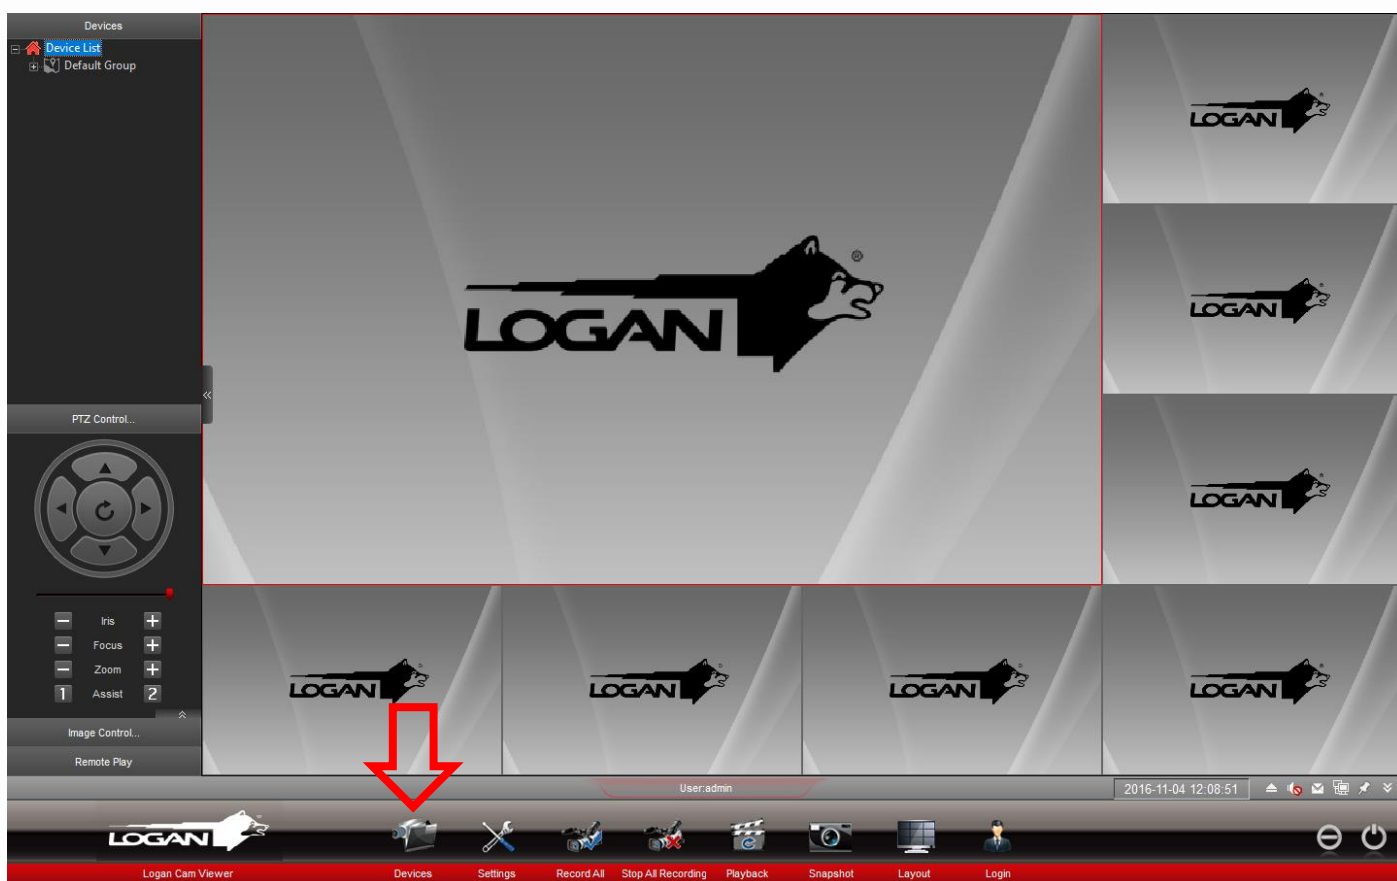

Presione el botón Manually (Manualmente) e ingrese los datos correspondientes a su equipo.

Devices Management

Vendor: All Device Type: All Devices Group: New Group Modify Delete

NO.	Alias	Logan Cam Vie	IP	Network Status
1	NVF28052794	192.168.1.69		Very Good

Device List  
Default Group

Search More Refresh Manually... Exit

Nota: Antes de incluir los datos de su equipo, debe ubicar el ID de su DVR, ubicado en la parte superior derecha de la pantalla principal.

Los datos a ingresar son los siguientes:

Device (Nombre): Nombre referencial, por ejemplo: casa, oficina, etc.

Vendor: por defecto, es Logan Cam Viewer


Connect Type (Tipo de Conexión): por defecto, es Logan Cam Viewer

Logan Cam: Ingresar el ID de su equipo DVR

UserName (Nombre de Usuario): por defecto, admin

Password (Contraseña): por defecto, en blanco

Presione OK.



The image shows a 'Device Config' dialog box with a red header. It contains several input fields and buttons. The fields are: 'Device' (text box with 'New Device'), 'Vendor' (dropdown menu with 'Logan Cam Viewer'), 'Connect Type' (dropdown menu with 'Logan Cam Viewer'), 'Logan Cam' (text box with '0'), 'Port' (text box with '9101'), 'User name' (text box with 'admin'), and 'Password' (text box with '\*\*\*\*\*'). At the bottom, there are three buttons: 'Ok', 'Network...', and 'Exit'.

Nota: Si el acceso de su DVR se estableció con una contraseña diferente, debe incluirla en el campo Password

Su equipo debe visualizarse en la parte izquierda de la pantalla, la cual debe desplegar y activar las cámaras que desea monitorear individualmente o todas seleccionando Connect (Main Stream) (Alta Resolución) o Connect (Minor Stream) (Baja Resolución).



Ha finalizado la configuración de su equipo DVR a través de la aplicación VMS desde su computador.

Any other questions you can contact our  
Technical Support Department at [support@logan-cam.com](mailto:support@logan-cam.com)

Cualquier otra consulta se puede comunicar al  
departamento de soporte técnico por medio  
del correo: [support@logan-cam.com](mailto:support@logan-cam.com)



<http://www.logan-cam.com/>