



Quick Setup Guide AHD Series

Identify Your Model

AHD SERIES LITE
 Modelo: L-D441-T ✓
 L-D842M-ND ✓ L-DX841M-ND ✓


PRODUCT CONTENTS



HOW TO CONNECT

Step 1: Connect the DVR to your MONITOR or TV

Connect a VGA or HDMI cord (not included) from your monitor or TV to the Output Port in the back of the DVR. Turn on your monitor or TV and select the appropriate input.

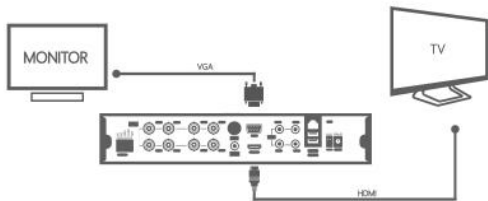

Step 2: Connecting the Cameras, Ethernet Cable and DVR

- Connect the USB cable to the bottom USB slot on the back.
- Connect the Ethernet cable to the back of the DVR.

• Connect the other end of the cable directly to your router or high speed connection input.


• Connecting the BNC & Power from camera with BNC power cable using the side labeled "To Camera Side Only".

• Using the other side of BNC power cable labeled "To DVR Side Only", connect BNC to BNC video input on DVR.

• Connect camera power cable to one of the multi power splitter ends.
 • Connect DVR power cable to the multi power splitter end labeled "DVR POWER"

• Connect DVR power supply to DVR
 Plug DVR power supply into wall outlet

Note: Make sure all cameras and cables are properly connected prior to powering on the system.

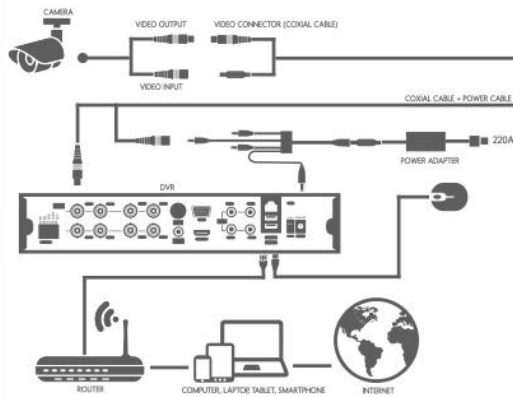

INSTANT MOBILE VIEWING
EASY SETUP


1 Press <Next> on the Welcome Page.



2 Log in with user name (default: admin) and password (default: leave it blank), to continue press OK.



3 Set up time and date according to the time zone of your country, to continue press Next.

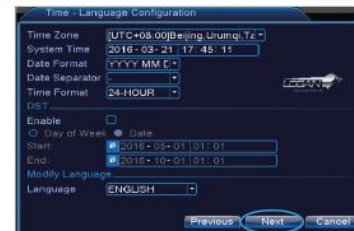


4 DVR is going to make sure you are connected into the internet, press Next to continue.



5 If you get an error just click the Network button below and follow the next step.



6 Make sure DHCP option is selected then press OK to continue.



PROCEED TO DOWNLOAD THE APP ON YOUR SMARTPHONE AND ADD YOUR DEVICE



Add the DVR with the Serial number that is located later on this setup Guide or Follow the next step.

- 1 Scan QR code
- 2 Serial number



Congratulations! You can now connect over the internet to view and playback videos on your Smartphone.

Need Help? Visit www.logan-cam.com or contact our technical Support team at Support@logan-cam.com




Guía de Configuración Serie AHD

Identifica tu Modelo

AHD SERIES LITE

Modelo: L-D441-T ✓
L-D842M-ND ✓ L-DX841M-ND ✓


CONTENIDO DEL PRODUCTO

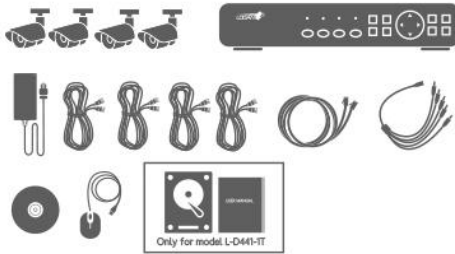

COMO CONECTAR EL EQUIPO


Paso 1: Conectar el DVR al monitor o al TV

Conectar un cable VGA o HDMI (no incluido) desde su monitor o TV al puerto de video en la parte posterior del DVR. Encender el monitor o TV y seleccionar la entrada de video correcta.

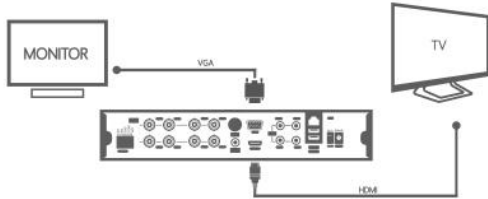


Paso 2: Conectado las Cámaras, Cable de Red y DVR.

- Conectar el BNC y corriente a la cámara usando el lado del cable BNC etiquetado como "To Camera Side Only".
- Usando el otro lado del cable BNC etiquetado como "To DVR Side Only", se conecta la entrada de video BNC directamente al DVR.



- Se conecta la energía a las cámaras conectándose a una de las puntas del cable multi splitter .
- Conectar el DVR a la energía usando la punta del multi power splitter etiquetado como "DVR POWER"
- Conectar el mouse al puerto USB ubicado en la parte posterior del DVR.
- Conectar el cable de red al puerto RJ-45 en la parte posterior del DVR.
- Conectar la otra punta del cable de red al dispositivo router con acceso a conexión internet.
- Conectar el adaptador de corriente a una toma de corriente de pared.

Nota: Asegúrese que todas las cámaras y cables estén conectados ante de energizar el sistema.

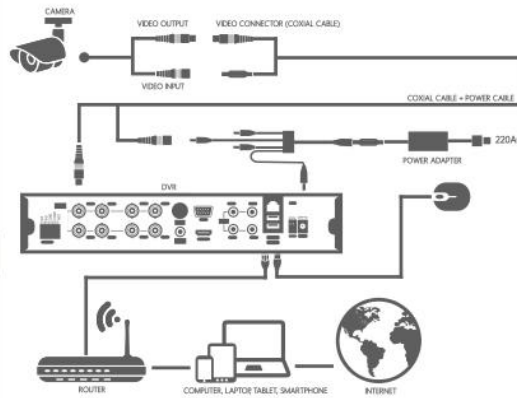

VISUALIZACIÓN INSTANTÁNEA MÓVIL CONFIGURACIÓN SENCILLA

1 Presione <Proximo> para la siguiente pantalla.

2 Iniciar sesión con usuario (defecto: admin) y contraseña (defecto: dejar en blanco), presione OK para continuar.



3 Establecer hora y fecha correspondiente a la zona horario de su país, presiona Proximo para continuar.



4 DVR realizara las pruebas para asegurar que exista una conexión al internet, para continuar presione Proximo



5 Si se le presenta un error seleccione el botón de <Red> y siga el siguiente pas, para continuar presione Red.



6 Asegurese de activar la opción DHCP y luego presione <OK> para continuar.



PROCEDER DESCARGANDO LA APP EN SU CELULAR SMARTPHONE Y AGREGANDO SU EQUIPO DE LA SIGUIENTE MANERA



Agregue el número serial de su equipo, el cual puede ubicar en la guía o en la barra de tareas de su DVR.

1 Modo escaneo codigo QR 2 Modo de número serial



Felicitaciones! Usted se puede conectar a través del internet para visualizar su equipo y reproducir videos desde cualquier lugar del mundo desde su teléfono inteligente.

Necesita ayuda? Visite www.logan-cam.com o contacte a nuestro equipo de soporte técnico al siguiente email: Support@logan-cam.com